


Partsbook

for


Multi Quick Processor Pulverizer jaw MQP-30-P

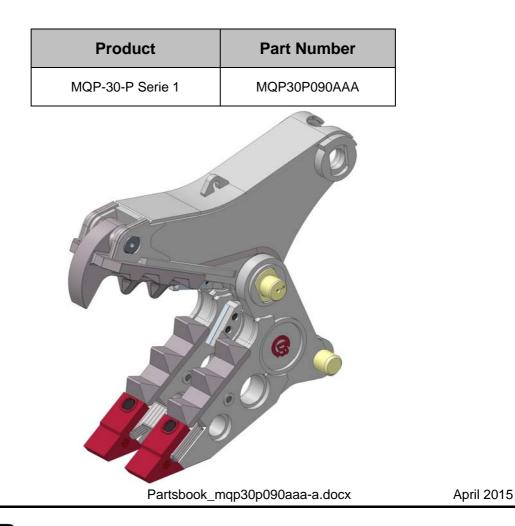


Demarec Demolition and Recycling Equipment BV

Den Hoek 10, 5845 EL St. Anthonis, Netherlands

TEL. FAX INTERNET E-MAIL +31 (0) 485 442300 +31 (0) 485 442120 www.demarec.com info@demarec.com

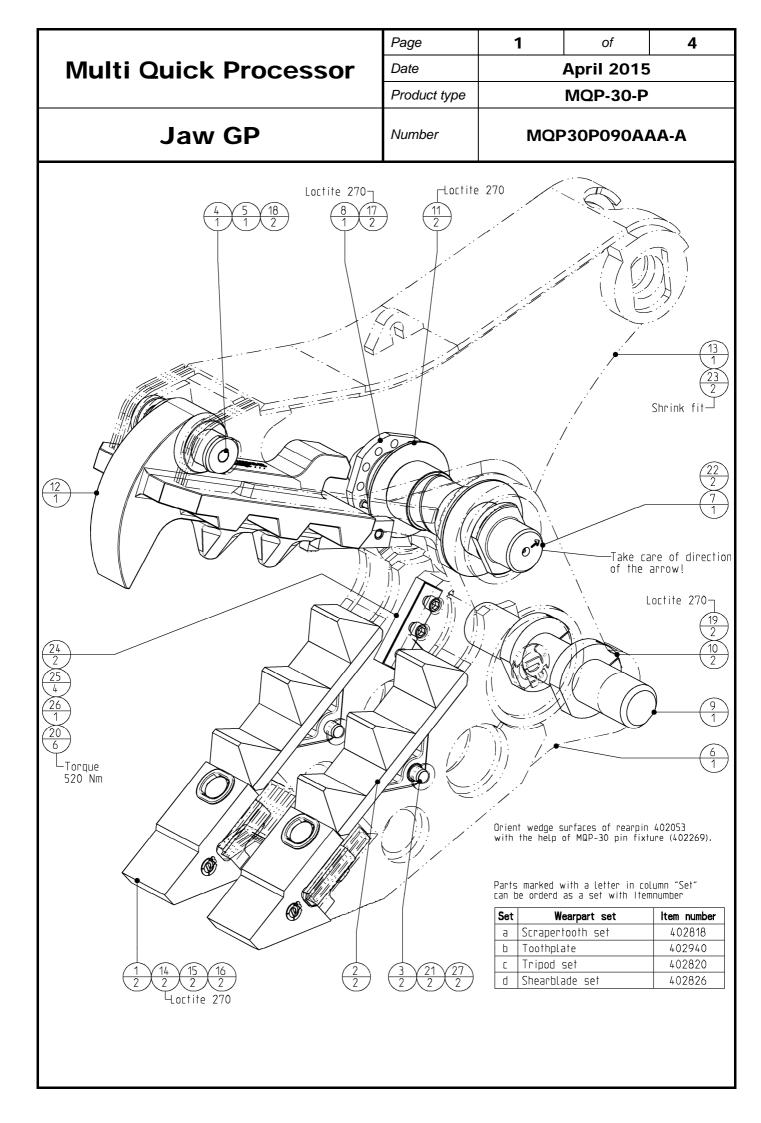

			Page	2	of	
Multi Quick P	roc	cessor	Date		April 2015	
			Product type		MQP-30-P	
Jaw GP			Number	ΜΟΡ30Ρ090ΑΑΑ-Α		
		-			-	
C	27	504053	0-ring	2		
d	26	500952	Shim - straight	1	_	
d	25	500951	Shim - straight	4	_	
d	24	500950	Shear - blade straight	2	_	
	23	500572	Bushing	2		
	22	500560	Grease - nipple	2	_	
C	21	500559	Tension bush - outside	2	_	
d	20	500270	Hex. socket head cap screw	6	_	
	19	500262	Hex. socket head cap screw	2		
	18	500258	Hex. socket head cap screw	2		
	17	500247	Hex. socket head cap screw	2	_	
а	16	500201	Bolts Hexagon	2	_	
а	15	500058	Washer HV	2	_	
а	14	500009	Nut Hexagon	2	_	
	13	404525	Jaw - upper asm. machined	1	1	
Ь	12	402940	Toothplate P-30 Serie	1	1	
	11	402481	Spacer	2	_	
	10	402053	Ring – clamp	2	_	
	9	402052	Pin	1	_	
	8	402051	Locknut M110x4	1	_	
	7	402050	Pin	1	_	
	6	402022	Jaw - lower asm. machined	1	_	
	5	401444	Lock – cover	1		
	4	401443	Pin	1	-	
	3	401311	Lock - pin	2		
C		1	Tripod	2		
C C	2	401194			-	
	2	401194 401193	Scrapertooth	2	-	

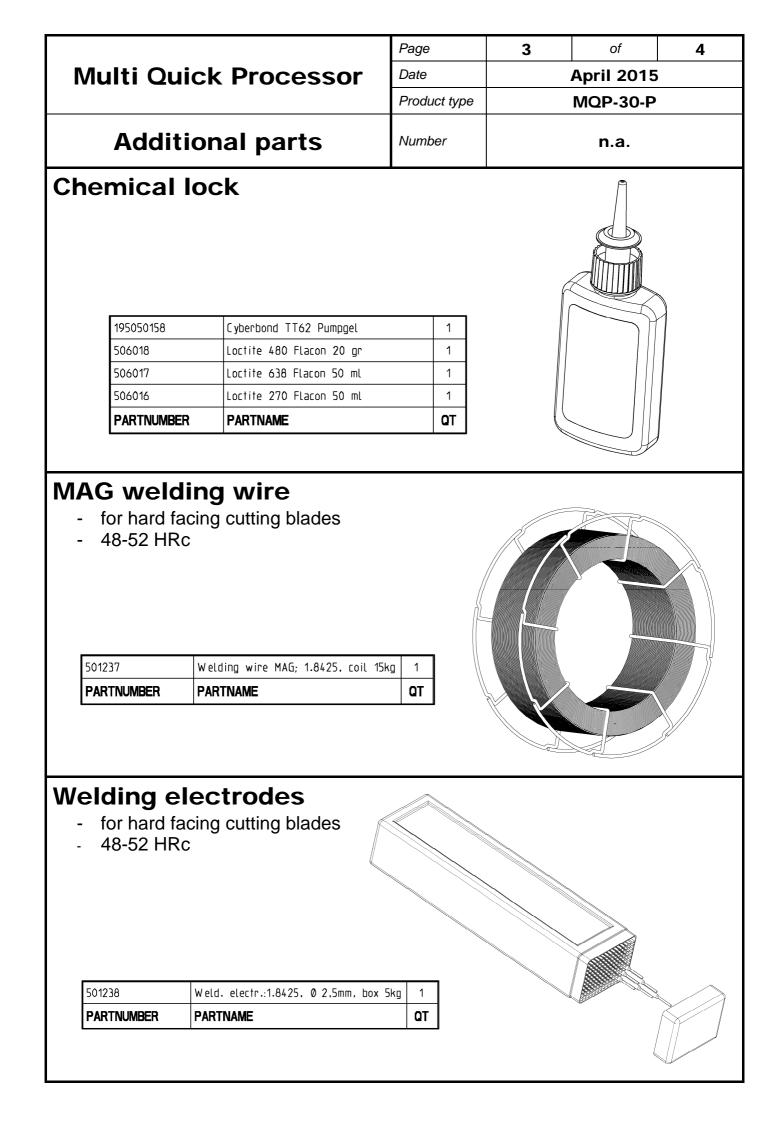

	Page	4	of	4	
Multi Quick Processor	Date	April 2015			
	Product type	MQP-30-P			
Instructions	Number		n.a.		

Mounting instructions for Cyberbound TT 62

This instruction shall guarantee that all hydraulic fittings and cartridges will be mounted and glued in correctly.

Procedure:

Clean and degrease thoroughly all components with a special cleaner for anarobic adhesives (e.g. Loctite cleaner 7063) or acetone.

Apply on the outside thread only a bead of Cyberbond TT62 pump gel to approx. 2/3 of the girth of the second thread for fittings up to a diameter of 20mm or to the entire girth for fittings with a diameter larger than 20mm.



Clean from adhesive residues pressed out from the bore hole after fitting.

ATTENTION. The sealings shall be free of adhesive residues!

Tighten fittings with given fastening torques.

Standard torque values for bolts

(when not indicated)

Thread	Torque (Nm) for quality					
size	8.8	10.9	12.9			
M8	22,5	32,4	38,7			
M10	45,0	63,0	75,6			
M12	77,4	109,0	131,0			
M16	194,0	270,0	324,0			
M20	369,0	522,0	630,0			
M24	639,0	900,0	1080,0			
M27	945,0	1305,0	1575,0			
M30	1260,0	1800,0	2160,0			

A KINSHOFER COMPANY	Czech Republic: Kinshofer CZ S.r.o. Cs. Legii 568 37810 Ceske Velenice Czech Republic TEL. +420 384 – 795 110 FAX +420 384 – 795 120	Beijing: Darda Kinshofer Construction Machinery Co. Ltd. Unit #306, Landmark Tower 2 8 Dongsanhuan Road 8 Beijing 100004 China TEL. +86 (10) 6590 6422 FAX +86 (10) 6590 6423 Email: info@darda.com.cn
	France: Kinshofer France S.A.R.L. B.P. 20100 67213 Obernai Cedex France TEL. +33 (0) 388 39 55 00 FAX +33 (0) 388 79 06 75 Email: info@kinshofer.fr	Finland: Kinshofer Aponox Oy Terminaalitie 10 13430 Hämeenlinna Finland TEL. +358 (0)75 7540 200 FAX +358 (0)75 7540 210
ER WORLDWIDE	United Kingdom: Kinshofer UK Ltd. 4 Milton Industrial Court, Horsfield Way, Bredbury Stockport, Cheshire, SK6 2TA United Kingdom TEL. 44 (0) 161 - 406 7014 Email: sales@kinshofer.co.uk	North America: Kinshofer North America 5040 Mainway Drive, Unit 11 Burlington, ON L7L 7G5 Canada TEL. +1 (905) 335 2856 FAX +1 (905) 335 4529 Tell. 1-800-268-9525 Email: seles-northamerica@kinshofer.com
DEMAREC AND KINSHOFER WORLDWIDE	Netherlands: Demarec Demolition and Recycling Equipment BV Den Hoek 10 5845 EL St. Anthonis Netherlands TEL +31 (0) 485 442300 FAX +31 (0) 485 442120 Email: info@demarec.com	Germany: Kinshofer GmbH Hauptstrasse 76 83666 Waakirchen Germany TEL. +49 (0) 8021 – 88 99 0 FAX +49 (0) 8021 – 88 99 37 Email: info@kinshofer.com